




I.最大卸载高度 Maximum dumping height	mm	2440
J.最大挖掘深度 Maximum digging depth	mm	2310
K.最大垂直挖掘深度 Maximum vertical digging depth	mm	1910
L.最大挖掘距离 Maximum digging distance at ground level	mm	3900
M.前端最小回转半径 Front minimum turning radius	mm	1430
N.后端最小回转半径 Tail minimum turning radius	mm	620
O.最大挖掘地面距离 Maximum excavation distance	mm	3840
P.最大推土高度 Maximum bulldozing height	mm	245
Q.最大推土深度 Maximum bulldozing depth	mm	200
R.铲斗水平左移 Bucket horizontal to left	mm	485
S.铲斗水平右移 Bucket horizontal to right	mm	410
性能参数 Parameters	单位 Unit	标准 Standard
整机重量 Operating Weight	kg	1920
铲斗容量 Bucket Capacity	m³	0.04
发动机型号 Engine		D902-E4B-CBH-1
排量 Displacement	L(cc)	0.890
额定功率 Rated Power	KW/rpm	11.8
行走速度 (高低) Walking speed(H/L)	KM/h	2 / 3.5
回转速度 Rotating Speed	r/min	11
摆动角度 Swing Angle	°	65 / 58
爬坡能力 Grade Ability	% (°)	58 (30)
接地比压 Ground Specific Pressure	kpa	25.5 (0.245)
铲斗挖掘力 Bucket Digging Force	KN	12.3
燃油箱容量 Fuel Tank	L	18

### LM20D-6 小型挖掘机 LM20D-6 MINI EXCAVATOR

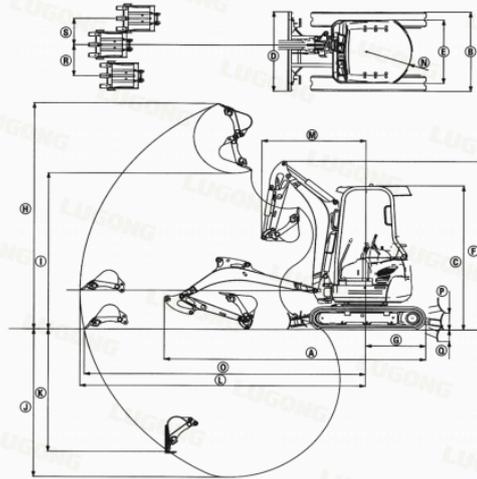

尺寸图 单位: mm  
Size diagram

A	3570
B	990/1240
C	2250
D	990/1240
E	760/1010
F	2630
G	815
H	3540
I	2440
J	2310
K	1910
L	3900
M	1430
N	620
O	3840
P	245
Q	485
R	485
S	410



整机尺寸 Overall size	单位 Unit	标准 Standard
A.总长 (运输时) Overall length (Transportation)	mm	3570
B.总宽 (运输/作业) Overall width (Transport / operation)	mm	990 / 1240
C.总高 (运输时) Overall height (Transportation)	mm	2250
D.推土铲宽度 (缩/伸) Dozer width (Contract / Stretch)	mm	990 / 1240
推土铲高度 Dozer height	mm	268
E.履带中心距 Track center distance	mm	760 / 1010
F.大臂高度 Boom height	mm	2630
G.回转中心到履带尾部距离 Distance from center of rotation to tail of track	mm	815
标准履带板宽度 Track plate width	mm	230
最小离地间隙 Minimum ground clearance	mm	145
标准铲斗宽度 (带/不带边齿) Bucket width (With/without side teeth)	mm	450 / 400
履带全长 Track length	mm	1585
轮间距 Wheel base	mm	1230
作业范围 Operating range	单位 Unit	标准 Standard
H.最大挖掘高度 Maximum digging height	mm	3540